

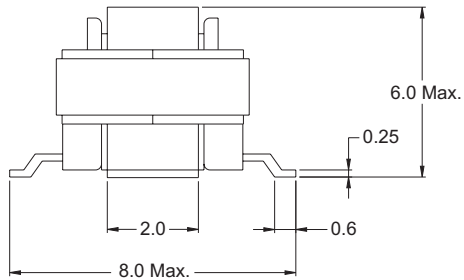





# Current Sense Transformers

## TCE0502H Type

Mechanical Dimension: Unit: mm



Schematic :

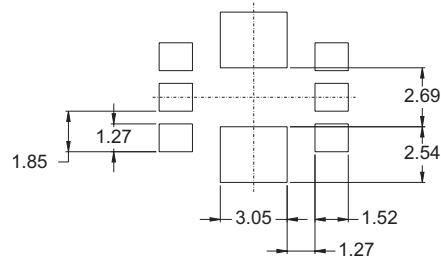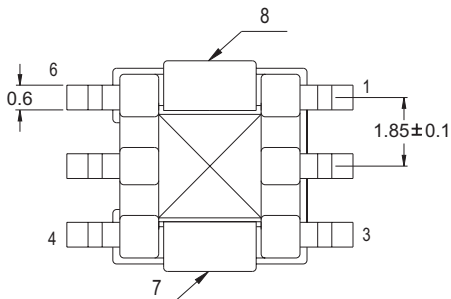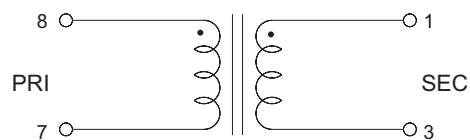

Recommended Pad

### Electrical Characteristics:

■ AT 25°C, 10KHz/1V Tested:

| PART NO.   | INDUCTANCE (uH) MIN | DCR (Ω) MAX | RATED CURRENT (Aac) | TURN RATIO PRI : SEC |
|------------|---------------------|-------------|---------------------|----------------------|
| TCE0502H01 | 180                 | 0.87        | 6.0                 | 1:30                 |
| TCE0502H02 | 320                 | 1.14        | 6.0                 | 1:40                 |
| TCE0502H03 | 500                 | 1.50        | 6.0                 | 1:50                 |
| TCE0502H04 | 720                 | 1.75        | 6.0                 | 1:60                 |
| TCE0502H05 | 980                 | 2.10        | 6.0                 | 1:70                 |

\* WITHSTANDING VOLTAGE BETWEEN PRI & SEC 0.2KV 1 MINUTE



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

<http://www.deltaww.com>